

MonoPower Large Half Cells

ASP HM6L-72 Series 540W-550W

Monocrystalline PV-module



QUALITY & RELIABILITY

Best raw materials, optimized production process and accurate testing makes the quality difference



GERMAN ENGINEERING

Best design by the art of German engineering



SAVE INVESTMENT

Product warranty of 12 years and performance warranty of 25 years



POSITIVE PERFORMANCE TOLERANCE

Up to +5 W plus-tolerance on output




FOR ALL ENVIRONMENTAL CONDITIONS

Resistant against PID, sand, salt and ammonia



STABLE AND STRONG

Capable to bear heavy snow loads up to 5400 Pa and wind loads up to 2400 Pa

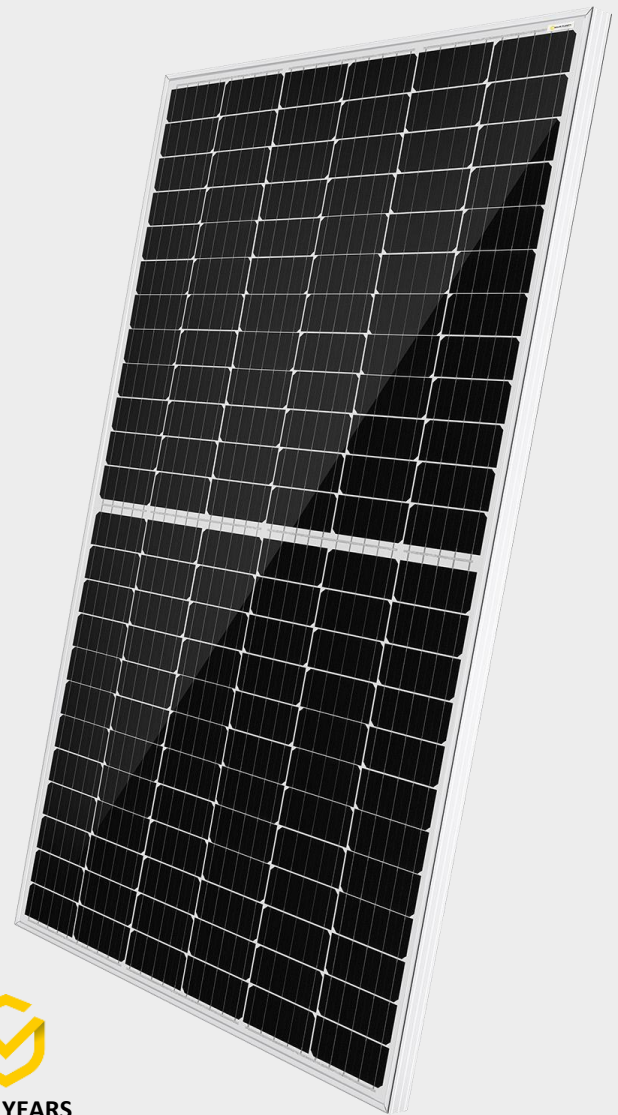


12 YEARS
PRODUCT WARRANTY

OUR PERFORMANCE GUARANTEE



25 YEARS
PERFORMANCE GUARANTEE

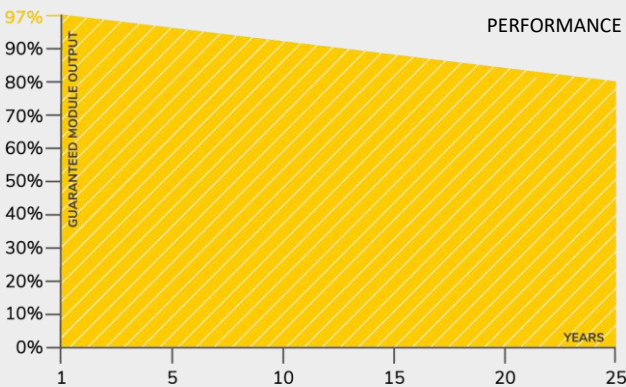


CERTIFICATES



IEC 61215
IEC 61730
PERIODICAL
INCEPTION



PID RESISTANT
SALT MIST RESISTANT
SAND RESISTANT
CORROSIVE GAS (NH₃)

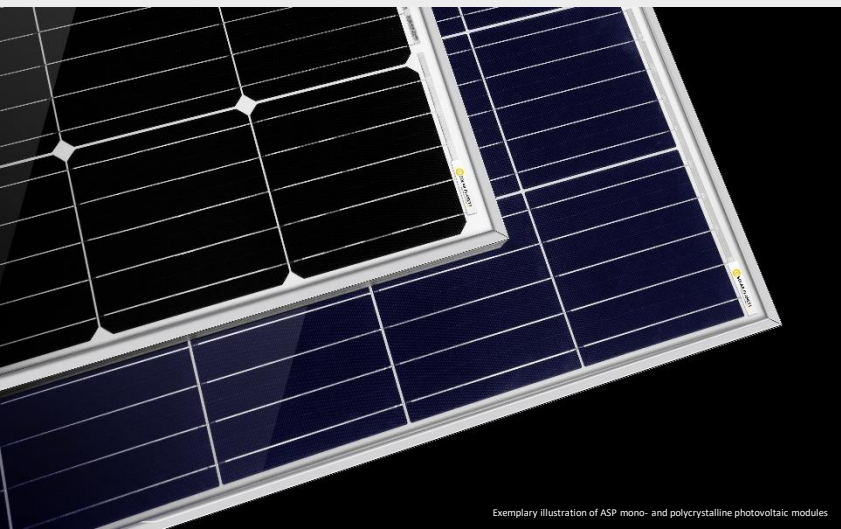

ALPHA SOLAR PLANET
Enjoy the quality difference

MonoPower Large Half Cells

ASP HM6L-72 Series 540W-550W

TECHNICAL DATA

		ASP540HM6L-72	ASP545HM6L-72	ASP550HM6L-72
Maximum power	P _{max} (Wp)	540	545	550
Maximum power voltage	V _{mp} (V)	41.93	42.16	42.57
Maximum power current	I _{mp} (A)	12.81	12.86	12.92
Open-circuit voltage	V _{oc} (V)	49.90	50.01	51.44
Short-circuit current	I _{sc} (A)	13.57	13.62	13.67
Module efficiency	%	20.9	21.1	21.3
Power tolerance	P _{max} (W)		0/+5	
Maximum system voltage DC	V		1500	
Operating temperature	°C		-40 to +85	
Temperature coefficients of P _{max}	%/°C		-0.350	
Temperature coefficients of V _{oc}	%/°C		-0.275	
Temperature coefficients of I _{sc}	%/°C		0.045	
Nominal operating cell temp. (NOCT)	°C		45±2	

The electrical data apply to standard test conditions (STC): Irradiance of 1000 W/m² with spectrum AM 1.5 and a cell temperature of 25°C.


MATERIAL CHARACTERISTICS

Cell type	Monocrystalline 182 x 91 mm
No. of cells	144 (6 x 24)
Dimensions	2278 x 1133 x 35 mm
Weight	27 kg
Junction box	IP68 rated
Output cable	4.0 mm ² , 350 mm length
Connector type	MC4 / MC4 compatible
Hail resistance	Max. Ø 25 mm, at 23 m/s
Wind load	2400 Pa / 244 kg / m ²
Mechanical load	5400 Pa / 550 kg / m ²

PACKING INFORMATION

Packing configuration	60 pcs / double pallet
Loading capacity	600 pcs / 40 HQ
Size / pallet	2310 x 1135 x 2490 mm
Weight	1750 kg / double pallet

DRAWINGS

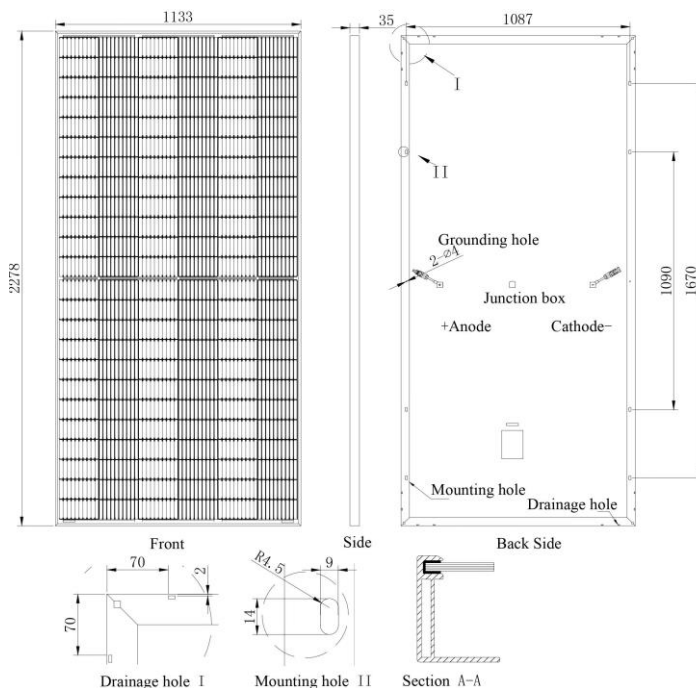

Alpha Solar Planet GmbH
Schwalbenweg 1 g, 86343 Königsbrunn
GERMANY

Tel.: +49 8231 99190 70
Fax: +49 8231 99190 89

E-mail: sales@a-s-p.solar
Web: www.a-s-p.solar

